


Basic 80



Adapter for Basic 80

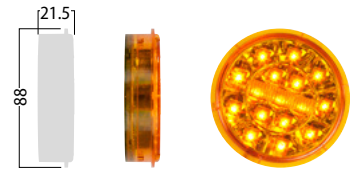




| | | | |
|------------------------|-----------------------|----------------------|---------------------|
| Certification | EN12352 - L2H | Flashing | Power cons. @12V |
| Input voltage | 12/24 VDC | Flash LED (10%) | 0.82 Ah /day |
| LED colour | ● ○ ● | Tri Flash (5%+5%+5%) | 1.23 Ah /day |
| Max. power consumption | 4.1 W | Single | 4.1 Ah /day |
| Dimensions | Ø 88 x 21.5 mm | Steady | 8.2 Ah /day |

FL (FlashLed) = 10%

Basic 80 and Basic 102 are LED warning lights for fixed or temporary use especially appropriate when reduced dimension is needed.

They are available only with external control and they are suitable for all the application where there is a need to warn, inform or guide road users.

Some examples of applications:



Adapter for Basic 102

Basic 102



| | | | |
|------------------------|----------------------|----------------------|--------------------|
| Certification | EN12352 - L2H | Flashing | Power cons. @12V |
| Input voltage | 12 VDC | Flash LED (10%) | 0.8 Ah /day |
| LED colour | ● ○ ● ● | Tri Flash (5%+5%+5%) | 1.2 Ah /day |
| Max. power consumption | 3.8 W | Singolo (50%) | 4.0 Ah /day |
| Dimensions | Ø 139 x 19 mm | Steady | 8.0 Ah /day |