

Light Trailer and Structure with manual lifting

- Available with signalling panel fig.400 o fig. 401
- Aluminum signalling frame
- Aluminium panels with Reflective Film CI II
- Optional remote control
- Fig.401:
 - 23 - Basic 211 LED**
 - 2 - Basic 304 LED**
- Fig.400:
 - 5 - Basic 304 LED**

Light Trailer

- Galvanized steel frame
- GVW max. 750 kg
- Closed case to house the batteries
- Adjustable shaft in height with repulsion



fig. 400




fig. 401



Control unit



LED headlights

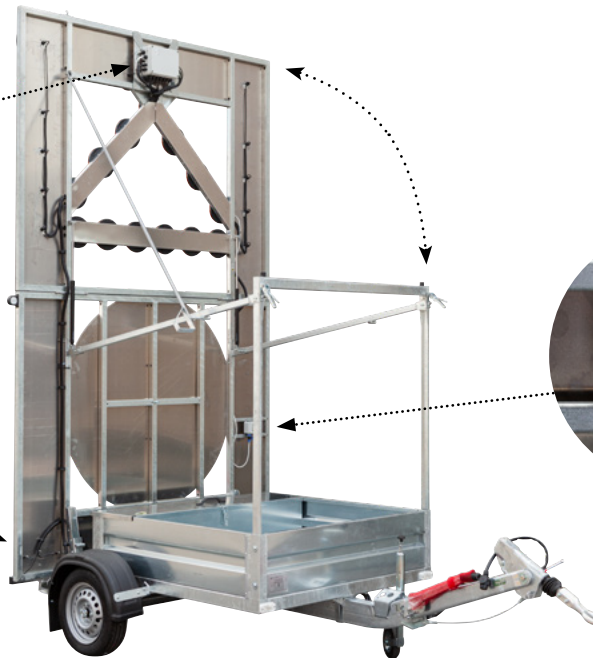

Control panel (optional remote control)

DA RIVEDERE IN INGLESE E FRANCESE

Fig. 401



left arrow



right arrow



cross

Fig. 400



Certification	Basic 211 EN12352 L8H Basic 304 EN12352 L9H
LED colour	●
Powered by	12/24 VDC
Power cons.	Fig 400: 75 Ah/d Fig. 401: 100 Ah/d