


# Visual LED

## TECHNICAL FEATURES



### Description

LED sequential chevron to be used for dangerous curves.

### OPTICAL FEATURES



Light source	58 LED Ø 5 mm arranged on two lines as intensifier of the film
Optic	Single-side
Colors	White
Flashing	50 flash/min; 8% Duty cycle
Optical Group Life	> 20'000 Hours

### ELECTRICAL FEATURES

Power Supply	12 Vdc (11 Vdc ÷ 15 Vdc)
Power consumption	3.6 W (1.2 W in stand-by)
Insulation Class	Class III

### MECHANICAL FEATURES

Dimensions	600 mm x 600 mm x 30 mm (+ 55 mm box)
Reflective film	Class 2 - Area: 0.24 m <sup>2</sup>
Weight	3.8 kg
IP Protection Degree	IP55
Operating Temperature	-10 °C ÷ +55 °C
Fixing	Standard omega guide for brackets

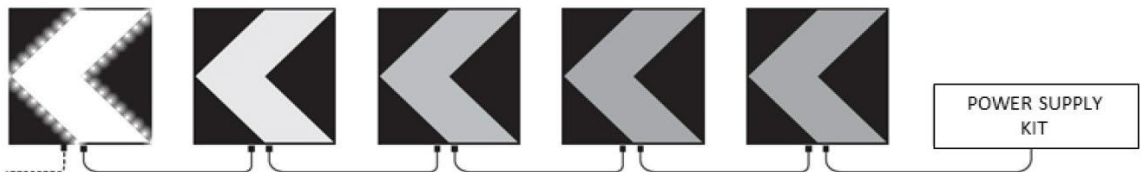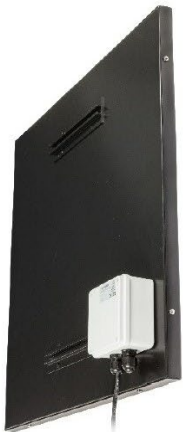

Rev. 3.0  
20/04/2023

Approved TEC

Approved AQ